

DORN SPECIFICATION SHEET
STUFFING TUBE, 45 DEGREES, NYLON

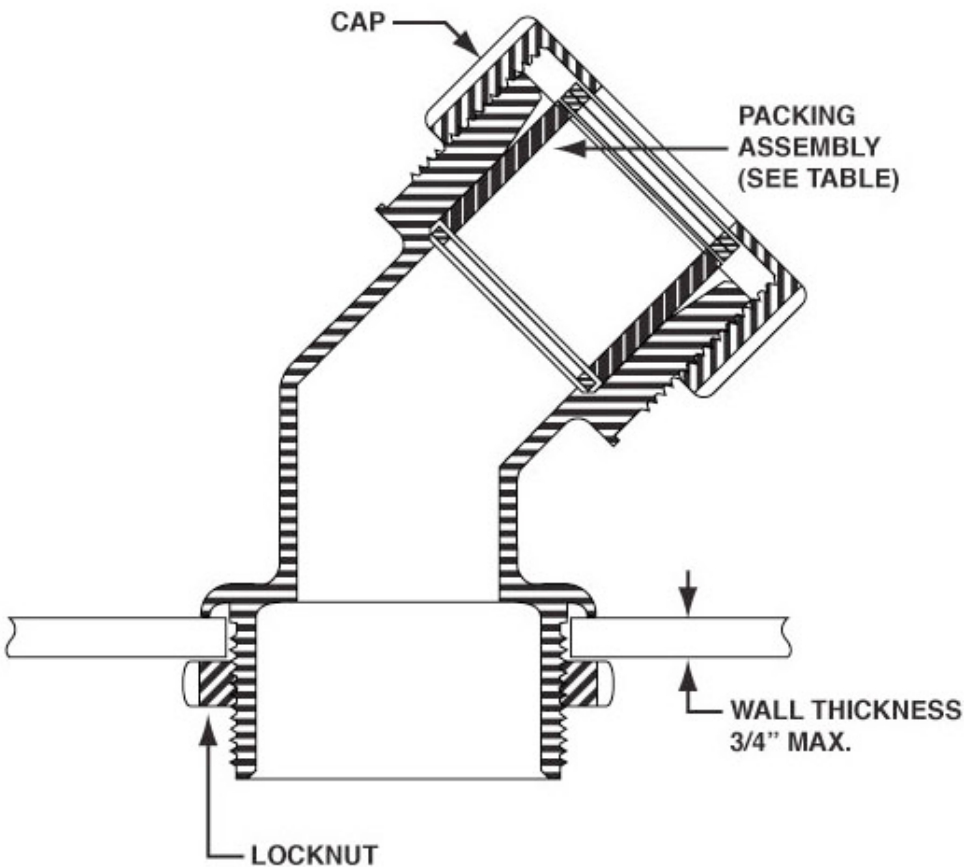


FIGURE 1. Configuration

Table I. Size Selection

Tube Size ^{2/}	Part Number	Part numbers of components			Packing Assembly 1/	Cable Range				Buna-N O-Ring	Clearance Hole	
						Inch		MM			Inch	MM
		Body	Cap	Locknut		Min.	Max.	Min.	Max.			
5	NYST -25-006	NYST -26-0006	M19622/ 10-0006	M19622/ 15-0004	M19622/20	0.752	1.113	19.10	28.27	-226	2.010	51.05
6	NYST -25-007	NYST -26-007	M19622/ 10-0007	M19622/ 15-0005	M19622/21	0.806	1.390	20.47	35.31	-230	2.510	63.75

1/ For information only, not to be furnished.

2/ For tube size 1 through 4T, see NYST-4.